


CORRENTES SOLDADAS, ELOS CURTOS

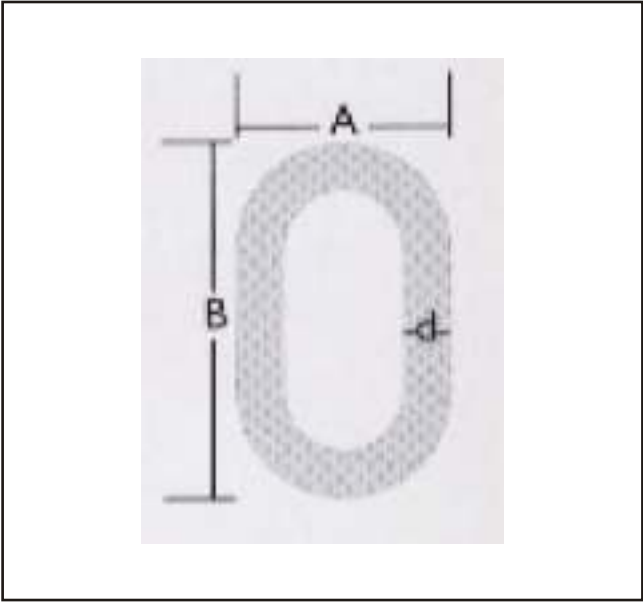

Diâmetro mm (d)	Diâmetro pol (d)	Dimensões Elos - (mm) AxB	Peso Kg/m	Resistência trabalho (Kgf)	Resistência ruptura (Kgf)
1,2	3/64	6 x 10	0,029	20	80
2,0	5/64	9 x 16	0,068	50	200
2,4	3/32	12 x 19	0,112	85	340
3,0	7/64	13 x 22	0,174	125	500
3,2	1/8	11 x 24	0,154	170	680
3,5	9/64	13 x 25	0,218	200	800
4,0	5/32	15 x 27	0,290	225	900
4,5	11/64	16 x 31	0,369	250	1000
5,0	3/16	18 x 33	0,461	350	1400
5,5	7/32	20 x 35	0,571	450	1800
6,0	15/64	22 x 40	0,678	500	2000
6,5	1/4	24 x 42	0,807	550	2200
7,0	9/32	27 x 44	0,957	600	2400
8,0	5/16	31 x 49	1,258	625	2500
9,0	23/64	34 x 53	1,607	700	2800
9,5	3/8	35 x 53	1,855	800	3200
11,0	7/16	42 x 63	2,452	1050	4200
12,5	½	46 x 72	3,069	1500	6000
14,5	9/16	51 x 79	4,221	1900	7600
15,5	5/8	53 x 82	5,038	2250	9000
19,0	3/4	67 x 106	7,892	3750	15000
22,0	7/8	79 x 131	9,7297	4825	19300
25,0	1	92 x 152,8	12,6891	6250	25000
28,5	1 1/8	102,5 x 171	15,9894	8000	32000
32,0	1 1/4	126 x 174	21,7199	10000	40000
35,0	1 3/8	126 x 210	27,0000	12750	51000
38,0	1 ½	126 x 202	28,6999	14000	56000

DM CORRENTES

Endereço: Rua João Nogarolli, nº 11 - Fanny - Curitiba - Paraná
Telefone: (41) 3569-3663 Fax: (041) 3569-4093 CEP: 81030-190
vendas@dmcorrentes.com.br