


Corrente de Rolo Passo Longo - Tabela de Medidas

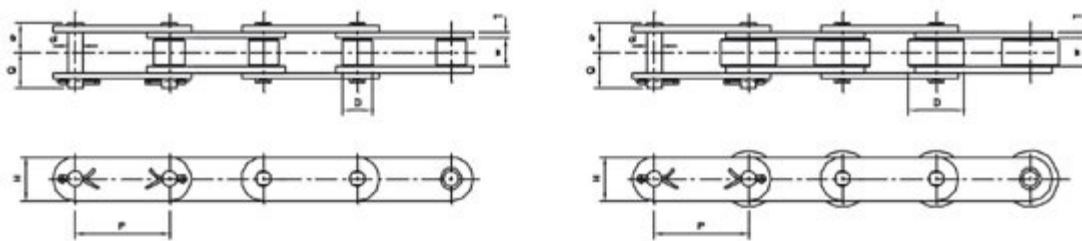

Dimensões (mm)

CORRENTE N°	Passo P		Largura entre Placas W	Diâm. do Rolo D	PINO			PLACA		DAIDO Carga de Ruptura média (Kgf)	DAIDO Carga Máx. Admissível (Kgf)	Peso Aprox. (Kg/m)
					Diâm. d	e	g	T	H			
DID C2040	25,40	1	7,94	7,92	3,97	8,2	10,1	1,5	11,7	1700	270	0,49
DID C2042				15,88								0,86
DID C2050	31,75	1.1/4	9,53	10,16	5,09	10,2	12,0	2,0	15,1	2930	450	0,84
DID C2052				19,05								1,32
DID C2060H	38,10	1.1/2	12,70	11,91	5,96	14,3	16,9	3,2	17,3	4100	660	1,45
DID C2062H				22,23								2,17
DID C2080H	50,80	2	15,88	15,88	7,95	18,0	20,7	4,0	23,3	7000	1150	2,00
DID C2082				28,58								3,10
DID C 2100H	63,50	2.1/2	19,05	19,05	9,54	21,9	24,5	4,8	28,8	11500	1900	3,60
DID C2102H				39,68								5,81
DID C2120	76,2	3	25,40	22,23	11,11	25,4	28,2	4,8	33,8	15000	2500	4,60
DID C2122				44,45								7,60